



STUVEX

FIRE & EXPLOSION SAFETY
ENGINEERING

EXPLOSION ISOLATION

VENTEX[®] ISOLATION VALVE

Application

Ventex explosion isolation valves prevent propagation of dust explosions by blocking the shock wave and flame front. Ventex valves are passive valves meaning they will close without requiring any external energy input. Ventex valves are suitable for low dust load process streams containing up to max. 50 g.m⁻³ of dust and are typically used to protect dryers, mills, filters, cyclones, etc.


Ventex features

- ◆ Certified for metallic and organic dust, gas or hybrid mixtures
- ◆ Stainless steel internal parts
- ◆ Can be mounted horizontally or vertically (option)
- ◆ Easy to maintain
- ◆ ANSI flanges available on request
- ◆ Housing in coated or stainless steel
- ◆ Easy to reset following an activation
- ◆ Optional position indicators available

Versions and sizes

ATEX certified Ventex valves are available in three versions in sizes DN100, DN150, DN200, DN300, DN400, DN500 and DN600.

- ◆ ESI-E: "single acting" closes in one direction
- ◆ ESI-D: "double acting" closes in both directions
- ◆ ESI-C: "check valve"

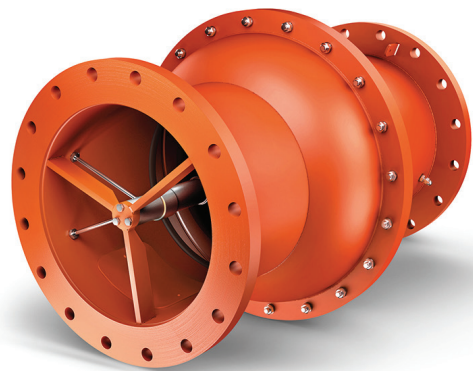

Maintenance and revision

Contact Stuvex for regular maintenance and revision of your Ventex explosion isolation valve. Stuvex is a certified Ventex repair center.



STUVEX

FIRE & EXPLOSION SAFETY
ENGINEERING

Stuvex International NV

Heiveldekens 8, 2550 Kontich Belgium
+32 34 52 25 52, info@stuvex.com

Stuvex France SARL

25 avenue de la Vertonne, 44210 Vertou France
+33 2 40 48 21 30, info@stuvex.fr

Stuvex Safety Systems Ltd

Abbey Studio, Church Walk Chertsey, Surrey KT16 8RE, UK
+44 19 32 57 13 03, info@stuvex.co.uk

Stuvex International NV (operation address)

P.za IV Novembre 7 / BlendTower, 20124 Milano, Italy
+39 34 03 74 80 67, info@stuvex.it